

Zato

Scrap Processing Solutions



Fixed Pulveriser

PELICAN

STURDY POWERFUL FAST



www.zatoshredder.com

SECONDARY DEMOLITION



THE PELICAN FIXED PULVERISER IS USED FOR SECONDARY DEMOLITION AND FOR PREVIOUSLY DEMOLISHED MATERIAL TO BE PULVERISED ON THE GROUND LEVEL. PELICAN WAS DESIGNED FOR THE PREPARATION AND SUBSEQUENT RECYCLING OF ROUND REINFORCEMENT BARS FROM CONCRETE.

The Pelican series hydraulic pulveriser is still the best solution to this day for pulverisation on the ground of previously demolished material.

It allows instant pulverisation of reinforced concrete directly at the works and easy separation of the round reinforcement bars, immediately initiating the process of re-use of the two materials. The fast Pelican is fitted as standard with a large integrated cylinder with regeneration valve to boost speed.


All this, along with its special structural shape, enables Pelican to tackle any type of job. Pelican is made out of Hardox, the best hard-wearing, lightweight and resistant material available on the market today.

The whole opening is fully modular, as the toothed plates lining it are interchangeable, thus enabling a completely new pulverising surface in just a few minutes, without having to resort to long and costly insert operations.

The knives allow the bars to be cut where necessary.



STURDY
STRUCTURE
FAST AND
POWERFUL
CYLINDER
CUTTING BLADE
EASY MATERIAL
LOADING AND
UNLOADING
INTERCHANGEABLE
TEETH PLATE

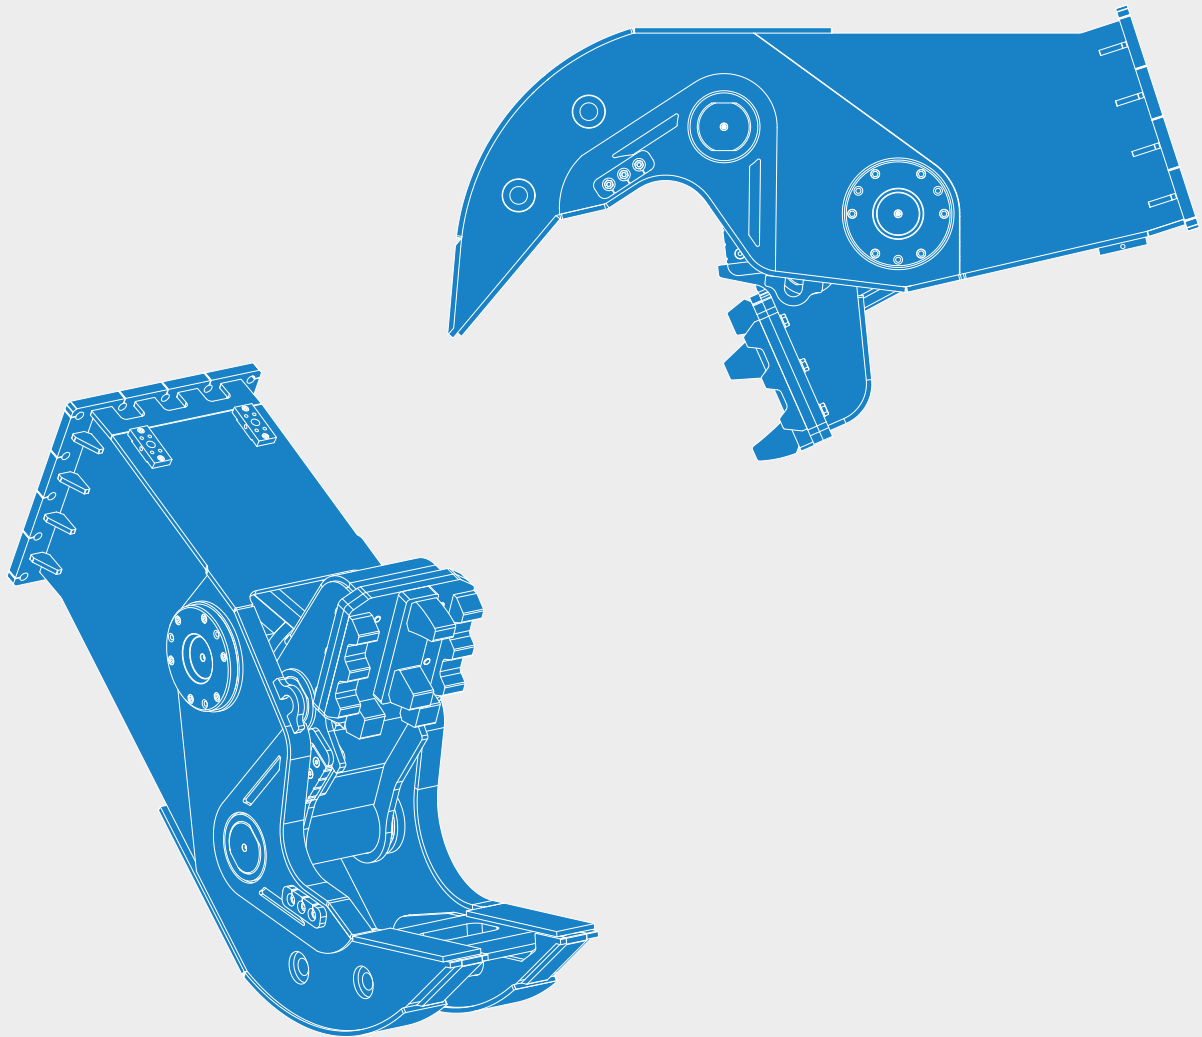

PELICAN

		F20	F27	F36
Weight	Kg.	1.950	2.650	3.600
	lbs.	4.300	5.843	7.937
Opening	mm.	850	1.050	1.200
	in.	34	42	48
Length	mm.	530	600	660
	in.	21	24	26
Excavator weight	Tonnes.	18	27	36
	USt.	20	30	40

Technical data is subject to change without obligation to give prior notice and ZATO SRL shall not be held liable in any way for this. rev. 2/2011



Zato

ZATO S.R.L.

Via Campi Grandi, 23
25080 PREVALLE (BS) - Italy

-
tel. +39 [0]30 6461800 r.a.
fax +39 [0]30 6801897

PELICAN

